



DW SERIES

DW551DR4


55" Dual Side Digital Signage




3000 / 1000NITS
DUAL SIDED DESIGN




PORTRAIT &
LANDSCAPE



CEILING
SUSPENDED



FLOOR
MOUNTED



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


65501 | V1.07

SPECIFICATION

MODEL	DW551DR4	
PANEL	LCD Panel Type	54.64 inches LCD (x2)
	Native Resolution	1920 x 1080
	Brightness	1000 nits/ 3000 nits
	Color Depth	8 bits
	Contrast Ratio	3000:1
	Response Time (Typ.)	9 ms
	Viewing Angle (H/V)	178° / 178°
POWER	Light Life Time (Typ.)	100,000 hrs
	Viewable With Polarized Lenses	Yes
	Power Supply	Internal
MECHANICAL SPECS	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max)	240 W / 380 W
	Power Saving Mode	< 1 W
USER INTERFACE	Bezel Width (T/B/L/R)	Even bezel 29.5 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD, w/o stand)	1272.8 x 743.3 x 62.7 mm
	Monitor Weight	40 kg
	Orientation	Portrait/ Landscape
	Carring Handles	Yes
	Language	English
INPUT	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Proof of Image Retention	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
	HDMI 1.4b (HDCP 1.4)	x2 (1080p)
	Display Port 1.2	x2
OUTPUT	DVI-D	x2
	Micro SD Slot	x2 (For Internal Player)
EXTERNAL CONTROL	USB 2.0	x2 (For Internal Player)
	Audio	x2
INTERNAL PLAYER	RS-232	In x2
	RJ-45	x2 (LAN)
	Operating System	Android 7.1.2
	Processor	ARM Quad-Core Cortex-A7
	Clock Speed	1.2 GHz
ENVIRONMENT	Main Memory Interface	DDR3L-1066, 1GB
	Graphics	Mali-400MP2 GPU, Support OpenGL ES1.1/2.0
	Storage	Internal: Nand flash 8GB(multi sources) External: Support Micro SD, Up to 32GB
	Multimedia	VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
CERTIFICATION	Wireless Function	YES
	Operating Temperature	0° C ~ 45° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing

DIMENSIONS

Unit: mm [inch]

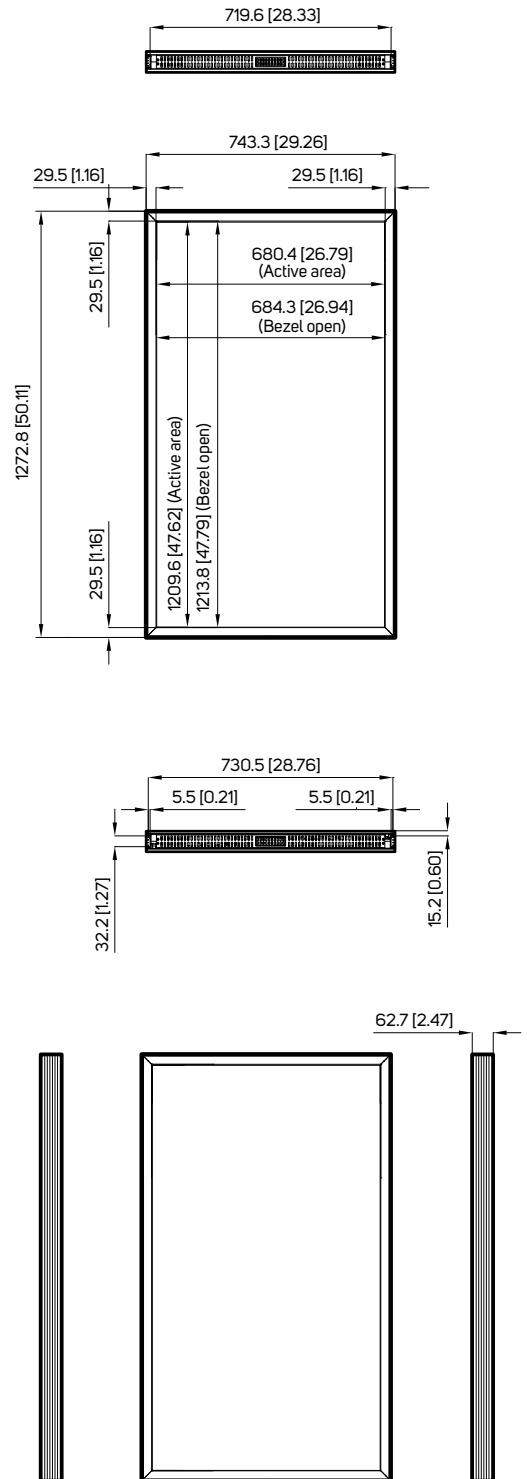

INTERFACE

