



DS SERIES

DS371BT4

37" High Brightness 3,000 nit Bar-type Display



**SUNLIGHT
VIEWABLE IMAGE**



**32 : 9
ASPECT RATIO**



**BUILT-IN
MEDIA PLAYER**



**THERMAL
MANAGEMENT**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.




DynaScan

SPECIFICATION

MODEL	DS371BT4	
PANEL	LCD Panel Size	37 inches LCD
	Native Resolution	1920 x 540 (32 : 9)
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	3000 nits
	Color Depth	8 bits
	Contrast Ratio	4000 : 1
	Response Time (Typ.)	16 ms
POWER	Viewing Angle	178° / 178°
	Light Life Time (Typ.)	50,000 hrs
	Power Supply	Internal
	Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
MECHANICAL SPECS	Power On Mode (Typ./ Max.)	95 W / 145 W
	Power Saving Mode	< 1 W
	Bezel Width (T/B/L/R)	11.7 / 11.7 / 5.6 / 5.6 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	914.9 x 280.8 x 51.5 mm
	Monitor Weight	9.0 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	200 x 100 mm
USER INTERFACE	Language	English
	Built-in Video Wall Support	Up to 15x15
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Image Retention Protection	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
INPUT	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
	HDMI	x1 (1080p)
	DVI-D	x1
	DisplayPort	x1
OUTPUT	USB	x1 (For Internal Player)
	SD Slot	x1 (For Internal Player)
	DVI-D	x1
EXTERNAL CONTROL	Audio	x1
	RS-232	In x1, Out x1
INTERNAL PLAYER	RJ-45	x1 (LAN)
	Processor	ARM Quad-Core Cortex-A9
	Clock speed	1.6 GHz
	Main memory interface	DDR3L-1066, 1GB
	Graphics	Mali400MP4, support OpenGL ES1.1/2.0, Open VG1.1
	Storage	Internal: Nand flash 8GB(multi sources) External: Support SD , Up to 32GB
	Multimedia	Multi-format 1080P video decoders (H.264,VC-1, MPEG-1/2/4, H.263, H.264 MVC, AVS, VP8/6, RV)
	Wireless Function	YES
ENVIRONMENT	Operating System	Android 4.4.2
	Operating Temperature	0° C ~ 40° C
	Storage Temperature	-20° C ~ 60° C
CERTIFICATION	Humidity	10% ~ 80% RH Non-condensing
	CERTIFICATION	CE / FCC / RoHS

DIMENSIONS

Unit: mm [inch]

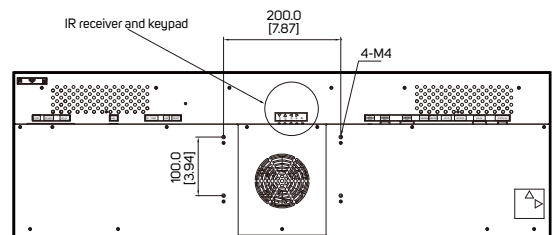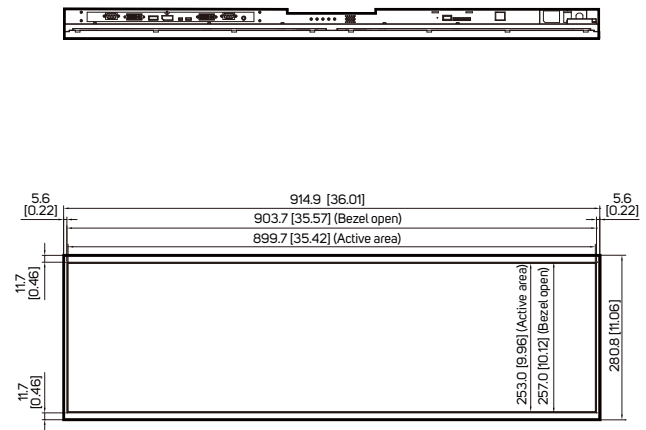

INTERFACE

